

USE AND ACTIVATION SYSTEM

Dispenser works in **behind the bar** mode (no wine card) or self service (with wine card or barcode reader*).



SERVICE TEMPERATURES

Dual zone ranging from 6°C to 22°C.
Without the divider from 15°C to 22°C



DOSAGES

Up to three different dosage through high quality mechanical buttons.



SOFTWARE CONNECTION

Connection between modules and software through LAN wire and WI/FI* with TCP/IP protocol.



BOTTLES LIFTING SYSTEM

Lifting system with pneumatic pistons.



WINE CARD

Chip or RFID cards.



REFRIGERATION SYSTEM

Use of modern no-frost, noiseless professional cooling system.




GAS

Nitrogen or food grade Argon (cylinder or generator not included).



CUSTOMIZATIONS

Machine color can be customized, Front panel can be silkscreened*



LED ILLUMINATION

Intelligent led RGB system for an infinite variety of color combinations.



LOCKING SYSTEM

Automatic lock activated by Smart Card or RFID.





ANTI CONDENSATION GLASS

Glass doors are treated with a special coating that prevents condensation .

*Optional

SPACE REQUIREMENTS

DIMENSIONS

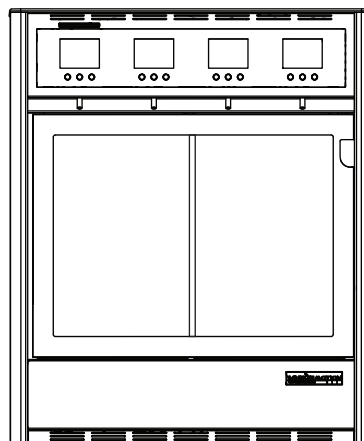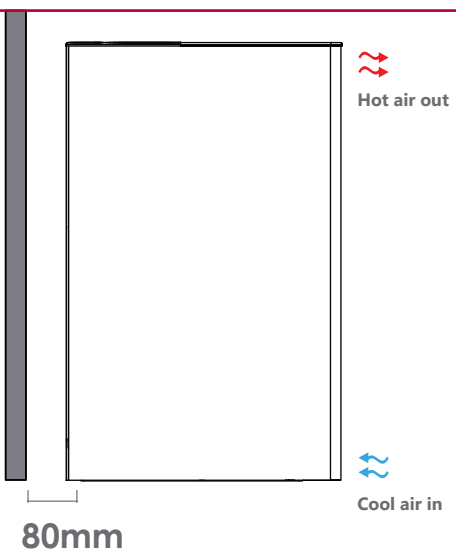

WIDTH	528mm 20 ¹³ / ₁₆ "
HEIGHT	632mm 24 ⁷ / ₈ "
DEPTH	398mm 15 ¹¹ / ₁₆ "
WEIGHT	76kg 167lbs



Temperature Combinations



CERTIFICATIONS

USA & CANADA 110VAC 60Hz

**NSF 25
UL 751
UL 541
CSA C22.2 #128**



EUROPE & WORLD 220VAC 50Hz

**NSF 25
IEC 60335-1
IEC 60335-2-75
IEC 60335-2-24**

