

SERVICE TEMPERATURES
Fully independent zones ranging from 7°C to 22°C.



DOSAGES
Up to three different dosage through high quality mechanical buttons.



BOTTLES LIFTING SYSTEM
Lifting system with gas spring pistons.




REFRIGERATION SYSTEM
Use of modern no-frost, noiseless professional cooling system.



GAS
Nitrogen or food grade Argon (cylinder or generator not included).





CUSTOMIZATIONS
Machine color can be customized, Front panel can be silkscreened*



LED ILLUMINATION
Intelligent led RGB system for an infinite variety of color combinations.

*Optional

SPACE REQUIREMENTS

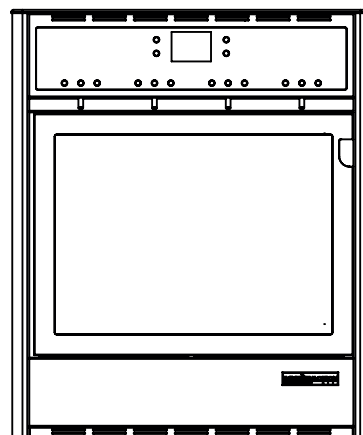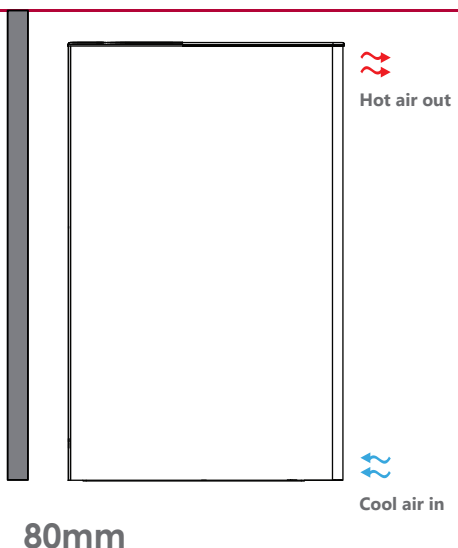

DIMENSIONS

WIDTH	527,27mm 20 ¹³ / ₁₆ "
HEIGHT	632mm 24 ⁷ / ₈ "
DEPTH	398mm 15 ¹¹ / ₁₆ "
WEIGHT	76kg 167lbs



CERTIFICATIONS

USA & CANADA 110VAC 60Hz

NSF 25
UL 751
UL 541
CSA C22.2 #128



EUROPE & WORLD 220VAC 50Hz

NSF 25
IEC 60335-1
IEC 60335-2-75
IEC 60335-2-24

